




ONICON SYSTEM-20 BTU METER WIRING DIAGRAM

FOR CONNECTION WITH ONICON FSM-3 SERIES
SUPERMAG INSERTION ELECTROMAGNETIC FLOW METERS



FLOW METER SIGNAL CONNECTIONS

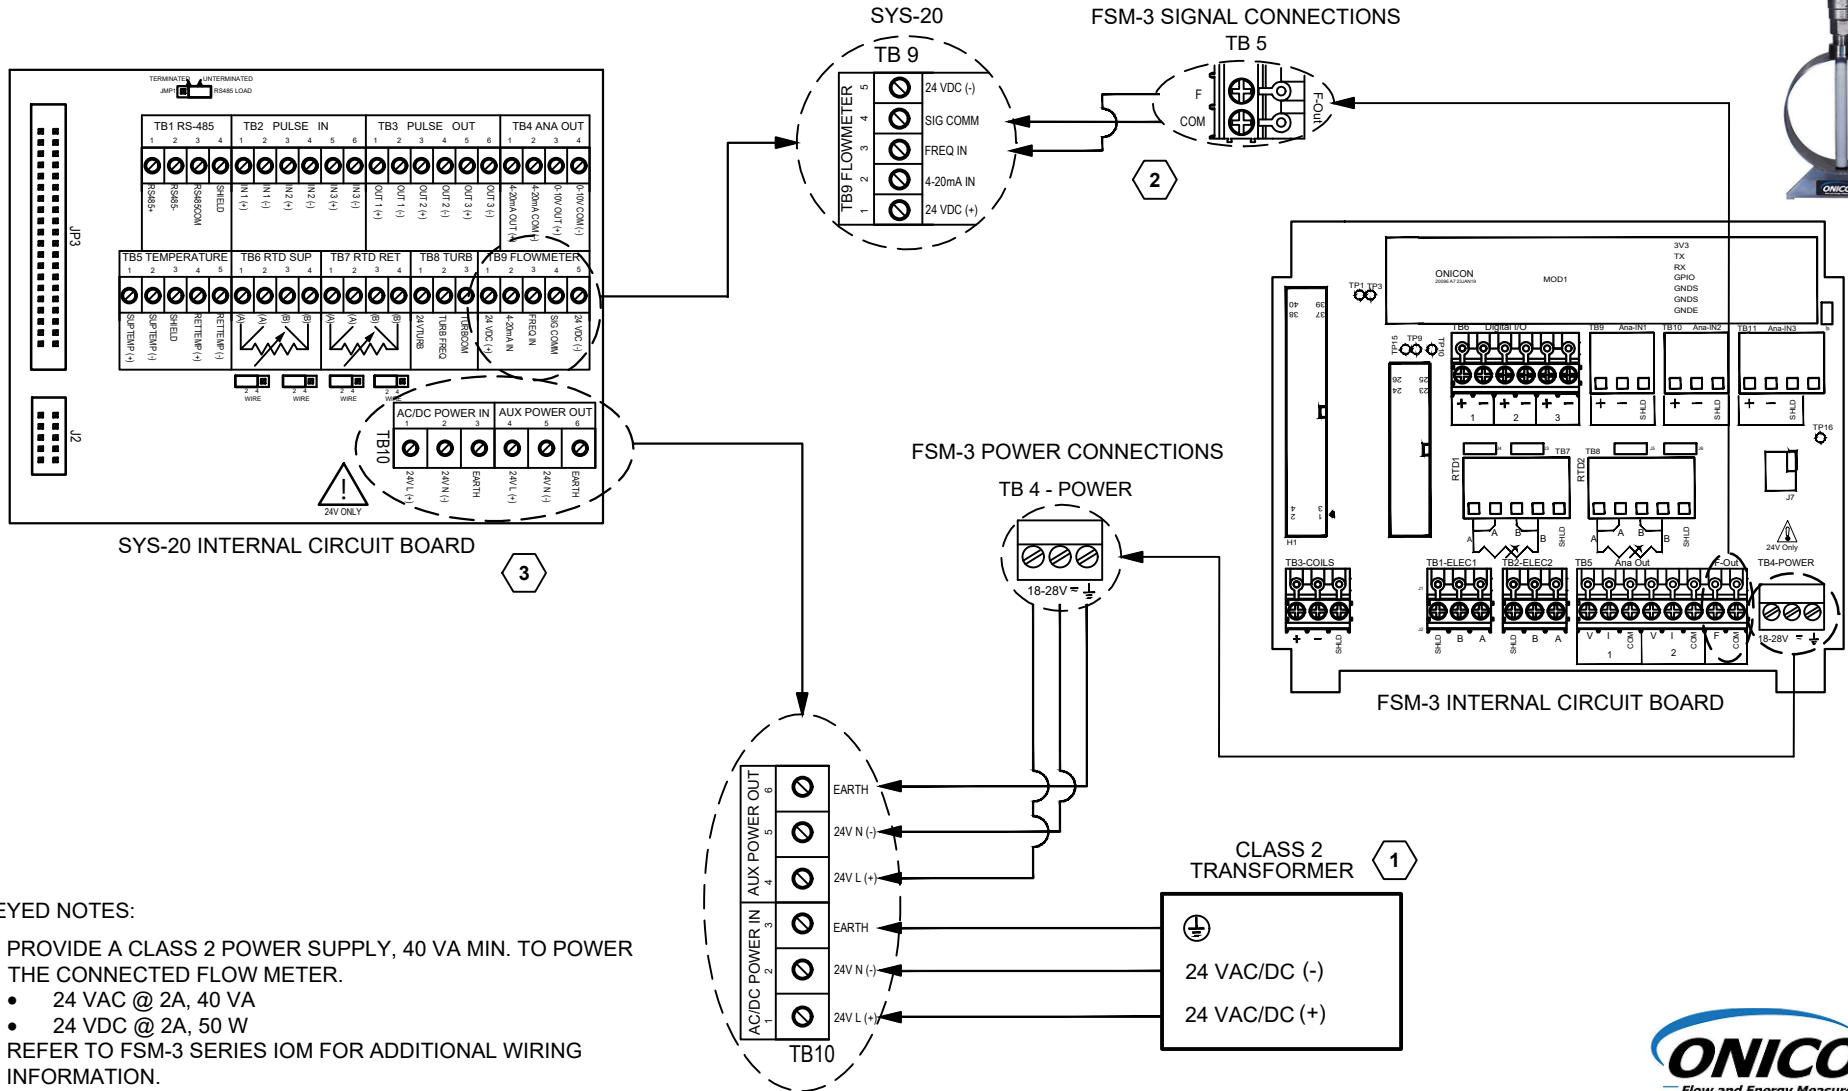

KEYED NOTES:

1. PROVIDE A CLASS 2 POWER SUPPLY, 40 VA MIN. TO POWER THE CONNECTED FLOW METER.
 - 24 VAC @ 2A, 40 VA
 - 24 VDC @ 2A, 50 W
2. REFER TO FSM-3 SERIES IOM FOR ADDITIONAL WIRING INFORMATION.
3. REFER TO SYS-20 IOM FOR ADDITIONAL WIRING INFORMATION.